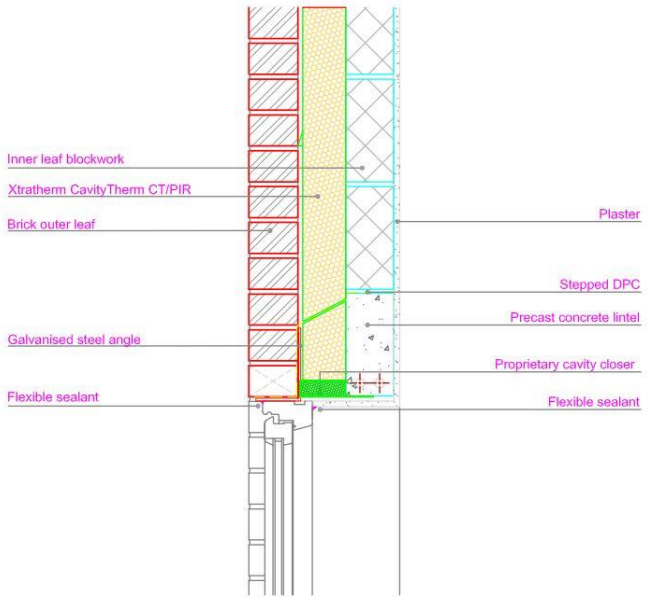
 C B A CONCRETE BLOCK ASSOCIATION	Linear Thermal Transmittance (ψ-value) PSI Value Temperature Factor (f-value)	Technical Services from Xtratherm
--	--	--

Certificate No: CBA-XT-CT-001	Issued : August 2014
Issued by Concrete Block Association	

Insulated Steel Lintel Table K.1 Ref E2 Approved ψ -value $= 0.30 \text{ W/mK}$	Inner leaf	100 mm blockwork
	Cavity	CavityTherm by Xtratherm, see table for options
	Outer leaf	102 mm Brick = 0.77

<p>KEY POINTS</p> <ol style="list-style-type: none"> 1. Minimum frame overlap to be 30mm 2. Close the cavity with insulation with $\lambda \leq 0.026$ 	
--	---

Calculations have been performed in accordance with:
 BS EN ISO 10211:2007, BR497 and BS EN ISO 13370:2007

Calculation prepared by : Xtratherm UK Limited

**Calculated ψ -values and f-values for perforated base plate lintel,
and **cavity insulation** as highlighted**

	Inner leaf blockwork					
	Ultra lightweight		Lightweight		Dense	
Cavity Insulation ↓	ψ -value W/mK	f-value	ψ -value W/mK	f-value	ψ -value W/mK	f-value
100mm CT-PIR	0.023	0.928	0.022	0.928	0.022	0.928
125mm CT-PIR	0.025	0.926	0.025	0.926	0.024	0.926
150mm CT-PIR	0.027	0.924	0.027	0.924	0.027	0.924

The f-value should be above 0.75 to minimise the risk of mould in dwellings.

NOTE: Because heat loss through windows and their frames is assessed separately, heat loss through the frame is not taken into account in the calculation of the ψ -value and f-value.

On-site Checklist

- Minimum frame overlap at least 30mm
- Cavity closed with insulation with ψ 0.026

Site manager/supervisor.....

Site name.....

Plot number.....

Date.....